



VIVAX
METROTECH


vCamLSR

Drain and Duct Inspection System



Drain and Duct Inspection System

- ▶ The new **vCamLSR** video inspection system is portable and compact enough to be carried anywhere.
- ▶ The **vCamLSR** allows you to inspect, view and record (using the video out socket) pipes and ducts ranging from 1" (25mm) up to 4" (100mm).
- ▶ Household drains can all be inspected and problem areas identified with minimal effort and disruption to the site owner.
- ▶ Depth and position of camera head can be pinpointed with use of a utility locator.

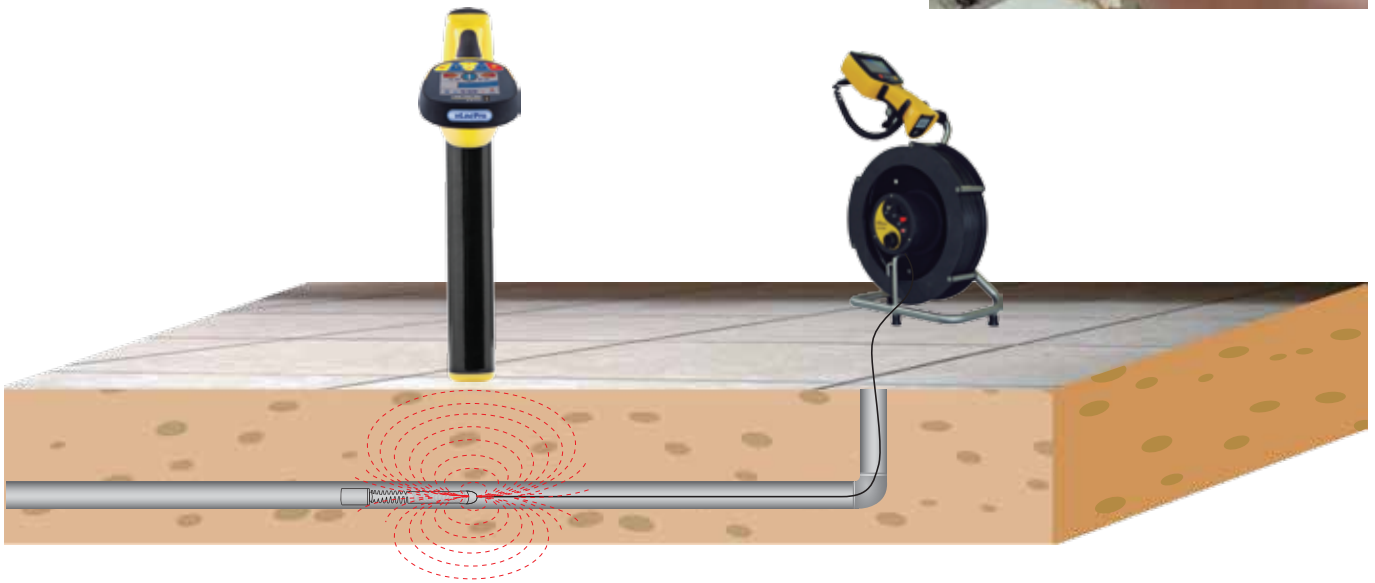

- ▶ Pinpointing the camera head is achieved with the use of the Sonde transmitter which is an integral part of the system.



Flexible Rod Cameras

- ▶ Flexible Rod Cameras allow inspection in hard to reach places such as: Small diameter pipes, floor, ceiling and wall joist framing spaces, sewer vents, and air return ducts.

Drain and Duct Inspection System



Specifications

Hand-held Display Unit

- ▶ Weight - 2.02lbs (0.92kg) (include batteries)
- ▶ Dimension - 3.91(L) x 3.84(W) x 8.65(H)in (99.28 x 97.34 x 219.63mm)
- ▶ 4 x AA alkaline batteries for 2 hours continuous use
- ▶ 3.5in (85mm) LCD display with RCA (Phono) video out socket (video output cable provided)
- ▶ Waterproof pushbutton controls
- ▶ Weather proof rated to IP54

Type-S Reel

- ▶ Weight - 13.23lbs (6kg)
- ▶ Dimension - 9.5(L) x 10.4 (W) x 10.8 (H)in (240 x 265 x 275mm)
- ▶ Batteries - Integrated Li-Ion Rechargeable and 110-240V AC (supplies 2 hours of operation)
- ▶ 60ft (20m) pushrod cable (Dia. 5mm) with integrated 512Hz or 640Hz Sonde
- ▶ Weather proof rated to IP54

Camera Head Options

- ▶ D17/STD - 0.04lbs (18.2g), 0.67 (Dia.) x 1.18 (L)in (17 x 30mm)
- ▶ D25/STD - 0.12lbs (56.4g), 0.98 (Dia.) x 1.6 (L)in (24 x 41mm)
- ▶ B33/STD - 0.19lbs (85.4g), 1.3(Dia.) x 1.6 (L)in (33 x 41mm)
- ▶ Waterproof to 0.6 bar (6m)



Accessories

Flexible Rod Cameras for vCamLS Viewer:

- ▶ D9 Flexible Rod Camera
- ▶ D17 Flexible Rod Camera
- ▶ Flexible extensions for D9 and D17 Flexible Rod



D9/ROD



D17/ROD



Flexible extension
for D9/ROD



Flexible extension
for D17/ROD

Camera Options for vCamLSR:

- ▶ D17/STD Camera
- ▶ D25/STD Camera
- ▶ D33/STD Camera




D17/STD



D25/STD



B33/STD



vCamLS Camera
Attachment Kit



vCamLSR Bag



Type-S Reel Bag



HL 5
Leak Detector



vLocCam

For more information contact :



Vivax-Metrotech Corporation

3251 Olcott Street, Santa Clara, CA 95054
T/Free: +1-800-446-3392 Tel: +1-408-734-1400
Fax: +1-408-734-1415 Email: sales@vxmt.com

Vivax Canada Inc.

400 Esna Park Drive, Unit 17, Markham, Ontario, L3R 3K2, Canada
Tel: +1-289-846-3010 Email: CanadianSales@vxmt.com